



Dławice MG - szare


materiał: poliamid 6 + chloroprene

kolor: szary RAL7035

stopień szczelności: IP68

temp. pracy: -40°C do +80°C

tolerancja: ±5%

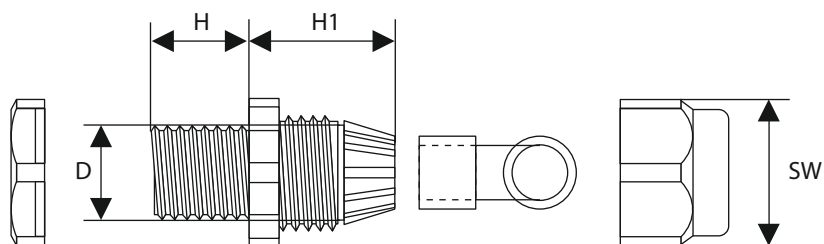

TYP	SKOK GWINTU [mm]	WYMIARY [mm]				ZAKRES DŁAWIENIA PRZEWODÓW [mm]	OPAKOWANIE [szt]	
		H	H1	D	SW			
MG-12	1,5	8,0	22,0	12,0	15,0	3 - 6,5	50	<input type="checkbox"/>
MG-16	1,5	10,0	28,0	16,0	22,0	5 - 10	50	<input type="checkbox"/>
MG-20	1,5	10,0	29,0	20,0	24,0	6 - 12	50	<input type="checkbox"/>
MG-25	1,5	10,0	35,0	25,0	33,0	13 - 18	50	<input type="checkbox"/>
MG-32	1,5	18,0	40,0	32,0	42,0	18 - 25	25	<input type="checkbox"/>
MG-40	1,5	18,0	49,0	40,0	53,0	22 - 32	10	<input type="checkbox"/>
MG-50	1,5	18,0	49,0	50,0	60,0	30 - 38	10	<input type="checkbox"/>
MG-63	1,5	18,0	49,0	63,0	65,0	31 - 44	5	<input type="checkbox"/>

CE IP68